


40W/80W Xenergy Siren Bars

ECE R65 Approved

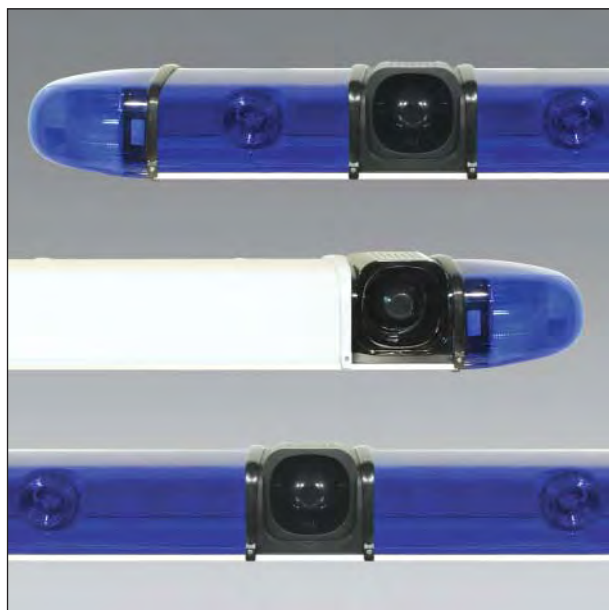

Certified to EMC directive 2004/104/EC.

Certified to ECE R65.

High voltage transient and polarity reversal protection fitted.

Operating temperature: -30°C to +55°C (-30°C lower limit subject to intermittent and non-continuous use at temperatures below -20°C).

End strobes	>42cd (blue)	120/min	double flash synchronous	IP65	40W: 100dB 80W: 105dB
Directional front/rear strobes	>400cd	65/min (nominal)	random		

Features:

Dual-tone siren bar.

- 40W and 80W versions
- 3 lengths available: 1000, 1400 and 1500mm
- 12 volt
- Siren with 'Wail' and 'Yelp' tones
- Xenon strobes certified to ECE R65
- 12 months' guarantee

Applications:

Emergency, fire and medical services.

Materials:

Polycarbonate lens covers, aluminium base extrusion.

Suitable for emergency, fire, medical and security services.

Product	40W	80W	Length		
2XB.1000	492040	—	1000mm	4.5A (max)	
4XB.1000	492041	—	1000mm	5.5A (max)	
2XB3I.1400	492044	492048	1400mm	40W 6.7A (max) 80W 8.2A (max)	
4XB1.1400	492045	492049	1400mm	40W 6.5A (max) 80W 8A (max)	
2XB3BI.1400	492046	492050	1400mm	40W 6.7A (max) 80W 8.2A (max)	
4XB1BI.1400	492047	492051	1400mm	40W 6.5A (max) 80W 8A (max)	
2XB.1500	492042	—	1500mm	4.5A (max)	
4XB.1500	492043	—	1500mm	5.5A (max)	