


SignalLED

Available from first quarter 2009.



Amber	Red	Blue
DAD1001	DAD1002	DAD1003

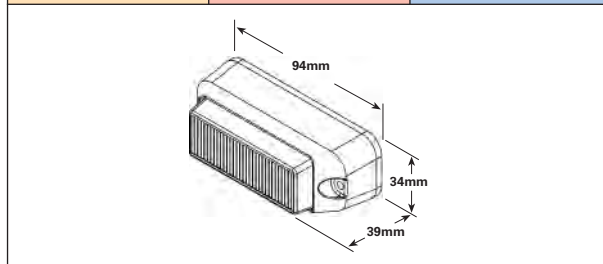

12-24Vdc	multi flash	0.2A (max)	IP67

Features:

A compact low power consumption maintenance-free LED beacon providing wide-angle light dispersion.

- 3 wide angled LED optics
- 14 flash patterns including 3 integral alternating flash modes
- 100,000 hours operation
- Die cast aluminium housing
- 5 year warranty

SAE J845 Class II. Certified to EMC directive 2006/28/EC

CE – complies with EMC Directive 89/336/EEC

Operating temperature: -30°C to +50°C.



Universal mounting bracket. DAD1004.



Window mounting bracket. DAD1005.



Deck mounting bracket. DAD1006.